

Stephen M. Kayatin, P.E. Sanitary Engineer

Sanitary Engineering Department

3230 N. Cole Street, Lima, Ohio 45801 Website: http://www.allencountyohio.com/sanitary-engineering/



LOW PRESSURE PUMP SYSTEM WHEN YOU NEED TO CALL FOR INSPECTIONS

- The E-One pump station must be inspected before it is backfilled. Call the Sanitary Engineering Department at least 24 hours prior to when the inspection is needed (ballast *must be exposed to ensure it is properly anchored).*
- Service lateral/force main must be inspected before backfill. Call the Sanitary Engineering Department at least **24 hours prior** to when the inspection is needed.
- The E-One pump station electrical work must be inspected by the Sanitary Engineering Department. Call the Sanitary Engineering Department at least 24 hours prior to when the inspection is needed.
- The Sanitary Engineering Department will make the hot-tap on the low-pressure sewer main once the main is properly exposed. Call the Sanitary Engineering Department 48 hours prior to when the hot-tap is needed. Steps 1, 2, and 3 must be completed and inspected before our department will perform a hot-tap.
- The E-One pump station must be started up by the Sanitary Engineering Department after the electrical work is inspected and approved. Call the Sanitary Engineering Department at least **24 hours prior** to when the start-up is needed.

Additional Information

- A. E-One pump may be picked up from ACSE Department between 7:30a.m. and 3:30p.m. Monday-Friday. Please call ahead so it will be ready for pickup.
- B. No work will be approved by the Sanitary Engineering Department without a permit being obtained from our office prior to any sanitary sewer related work being done.
- C. Final Grade Extension required (additional cost) should system final grade need adjusted.



Sanitary Engineering Department

3230 N. Cole Street, Lima, Ohio 45801



Website: http://www.allencountyohio.com/sanitary-engineering/

INSTALLATION REQUIREMENTS FOR LOW PRESSURE PUMP SYSTEM SINGLE FAMILY RESIDENCE

See Drawing GPD 1.0


E-One Pump Station purchased through ACSE Department at the time a permit is obtained. Call 419-996-4670 for pricing information. Pump portion of E-One will be supplied when system is ready for start-up.

- 1. When ordering, the Builder/Contractor is to determine:
 - a. Depth of cover over 4" inlet sewer.
 - b. Length of type TC direct-bury cable required between pump unit and alarm panel.
- 2. Items Included with Permit/Pump Purchase
 - a. E-One Model DH071 pump unit. 4" inlet for 4" Sch 40 PVC pipe
 - b. MOD-250-1 alarm panel
 - c. Pre-Cast Ballast
 - d. Service Lateral Kit for 11/4" SDR 11
 - e. HDPE Pipe Valve Box
 - f. 32' Type TC electric cable to service pumps
 - g. Corporation stop with corporation saddle
- 3. Bill of Materials by Builder/Contractor:
 - a. 30amp fused disconnect (#10AWG-4 wire:2 pwr, neutral, & ground)
 - b. 11/4" x 11/4" Stainless Steel bushings
 - c. 11/4" DR 11 HDPE (green stripe or solid green pipe) for discharge force main
 - d. Copperhead #12 solid green tracer wire or equal installed with 11/4" force main between the pump and the pressure main.
- 4. House lateral to be 4" Sch 40 PVC ASTM D 1785 - PVC Sch 40 pressure rated ASTM D 2665 – PVC Drain, Waste and Vent Pipe
- 5. Electric service to be 240v / 1ph / 60 Hz to the pump location.
- 6. Builder/Contractor must contact ACSE Department 48 hours in advance to schedule an inspection.
- 7. Pump Start-up
 - a. Electrical work to be completed before pump start-up can be scheduled.*
 - *Refer to diagram inside E-1 panel
 - b. ACSE Department to initiate and complete the start-up of the pump installation.
- 8. Service Agreement to be granted to ACSE Department by property owner for operation and maintenance of pump station and electrical. This must be signed by the property owners before pump station will be started-up.

 R:\Sanitary Engineer Shared\Rules, Regulations, Procedures, and General Specifications\2021 Editions\2021 Construction and Design Specifications\Service Lateral Requirements\Low Pressure Single

Family\Low Pressure- SingFam Home 2022.docx

CAUTION: DO NOT ALTER PANEL OR ANY PART OF THE TANK OR COMPONENTS

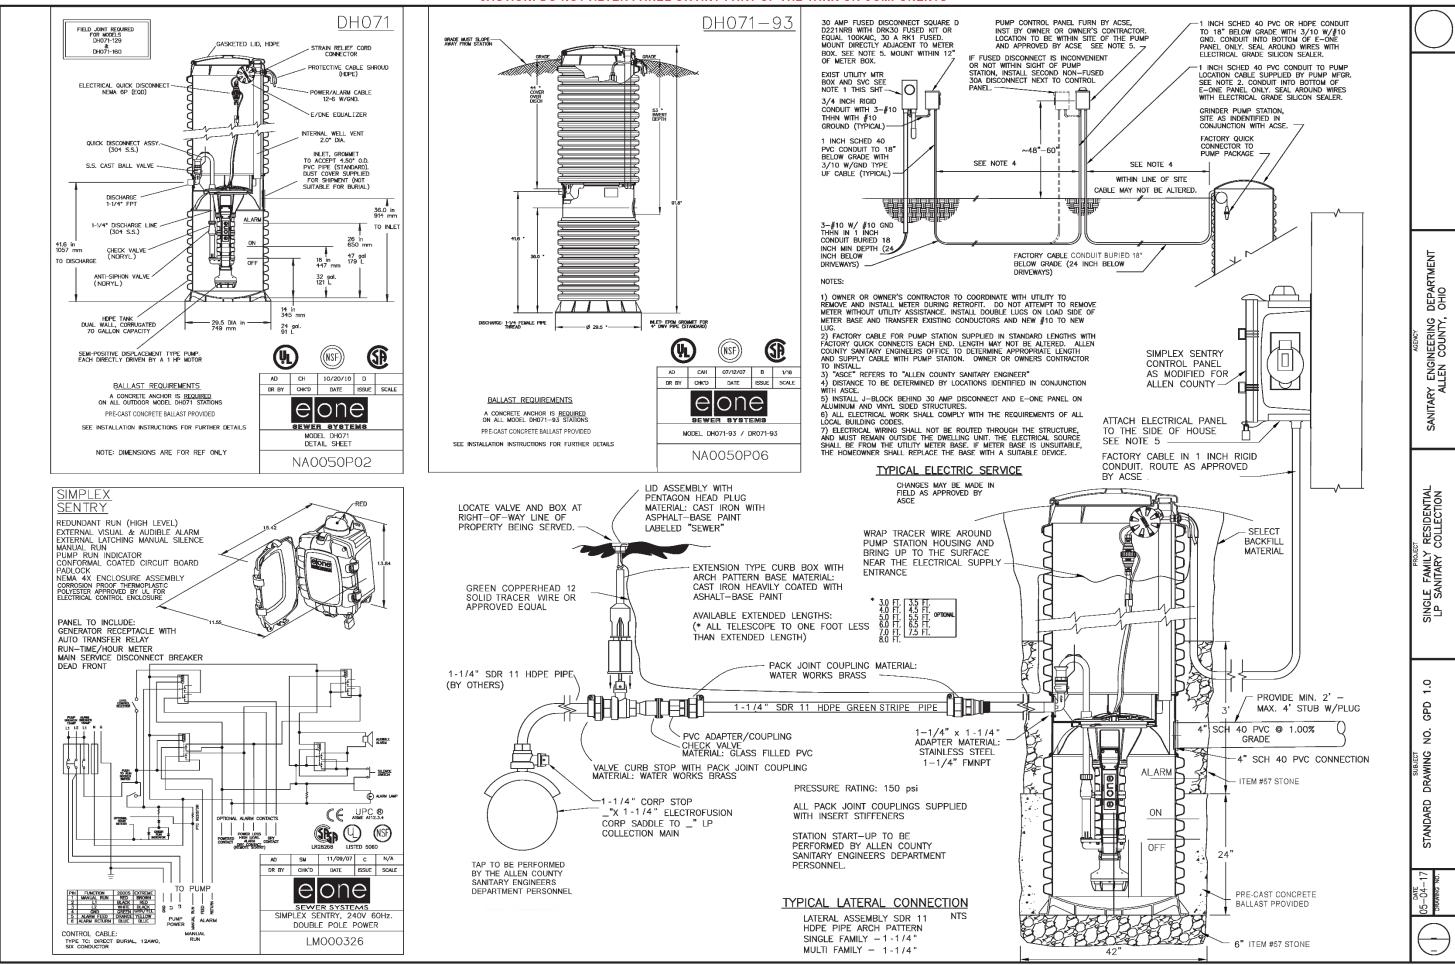

D:\ep\ACSE\Standards\GRINDER PUMP DETAILS 1.dwg, DETAIL 22X34, 6/29/2017 8:19:00 AM

 \bigcirc

 \bigcirc

 \bigcirc